

UNCLASSIFIED

AD 286 106

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

63-1-2

FTD-TY-62-483

CATALOGED BY ASTIA
AS AD NO. 286 106

TRANSLATION

A CENTRIFUGAL ATOMIZER FOR LIQUID AND COLLOID
SOLID FUELS

By


Gerhard Gutter

FOREIGN TECHNOLOGY DIVISION

AIR FORCE SYSTEMS COMMAND

WRIGHT-PATTERSON AIR FORCE BASE

OHIO



286 106

UNEDITED ROUGH DRAFT TRANSLATION

A CENTRIFUGAL ATOMIZER FOR LIQUID AND COLLOID SOLID FUELS

By: Gerhard Gütter (East Germany)

English Pages: 3

Source: A Translation of Soviet Patent No.
620929/25.
(Class 46f, 14; No. 134641; Sub-
scription Group No. 197)
(Application to the Committee of
Inventions and Discoveries Under
the Council of Ministers, USSR,
March 3, 1959)

[An abstract of this patent appeared
in SOV/19-60-0-24-122/123]

SC-1234
SOV/19-60-0-24-122/123

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION SERVICES BRANCH
FOREIGN TECHNOLOGY DIVISION
WP-APB, OHIO.

FIRST DRAFT OF REPORT

A CENTRIFUGAL ATOMIZER FOR LIQUID AND COLLOID SOLID FUELS

Gerhard Gütter (East Germany)

The familiar centrifugal atomizers for liquid and colloid solid fuels burned in the combustion chambers of gas turbines, have a cone-shaped atomizer body which rotates in a fixed case. However, such atomizers are not sufficiently efficient.

This disadvantage is eliminated in the proposed atomizer, by virtue of the fact that the body of the atomizer is made in the form of a cup wheel on a circular projection from the drive shaft. This body has, on the fuel-intake side, an annular cavity for receiving and accelerating the fuel; on the side of the combustion chamber it has a cavity with a dual cone whose generatrices diverge toward the combustion chamber. Both cavities are separated by a wall with inclined apertures whose axes diverge toward the combustion chamber. The fixed case of the atomizer can be fitted with channels to feed the annular cavity of the body, tangent to and inclined toward the atomizer axis.

The atomizer is shown in the accompanying sketch.

The centrifugal atomizer for liquid and colloid solid fuels

consists of fixed case 1 and body 2 which rotates inside the case; this body has the shape of a cup wheel and is placed on annular projection 3 of drive shaft 4.

Fuel flows through channels 5 of case 1 toward the tangential channels 6, from which it emerges in the direction of rotation of body 2 with a certain acceleration in annular cavity 7 of the body. Here the fuel is distributed in a circular layer; after passing through aperture 8 in wall 9, the fuel forms a thin film on the conical surface 10 of cavity 11. This film gradually thins out toward combustion chamber 12 such that on conical surface 13 of cavity 11 the film is extremely thin, so that it can be easily removed from edge 14. Hot air enters inner cavity 15 of body 16; part of this air passes through aperture 17 into cavity 11 and, flowing along annular gap 18, partially evaporates and partially atomizes the fuel which is in the form of a thin film on conical surface 13.


The described atomizer makes it possible to improve fuel-combustion conditions, to obtain uniform temperature distribution throughout the combustion chamber and lower the thermal stress in it, increase the efficiency of gas turbines, simplify their design and manufacture, and also economize on refractory steel and other expensive materials.

Object of the Invention

This centrifugal atomizer for liquid and colloid solid fuels burned in the combustion chambers of gas turbines consists of a cone-shaped atomizer body which rotates in a fixed case. It has the following special feature: the body is made in the form of a cup wheel on a circular projection from the drive shaft. On the fuel-intake side it has an annular cavity to receive and accelerate the fuel; on

the combustion-chamber side it has a cavity with a double cone whose generatrices diverge toward the combustion chamber; both cavities are separated by a wall and intercommunicate through inclined apertures whose axes diverge toward the combustion chamber.

A variant of this in one in which the case has fuel-feed channels inclined toward and tangent to the axis; these feed fuel to the annular cavity of the atomizer body.

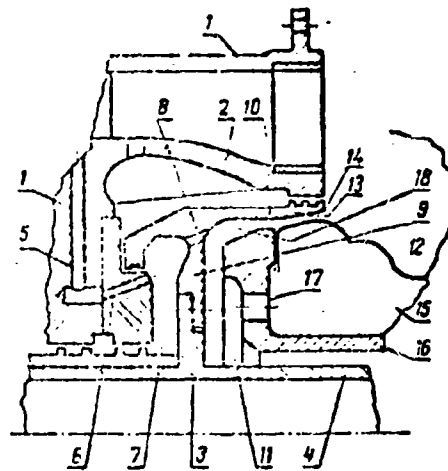

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE	Nr. Copies	MAJOR AIR COMMANDS	Nr. Copies
		AFSC	
		SCPTR	1
		ARO	1
HEADQUARTERS USAF		ASTIA	10
		TD-B1a	3
AFCIN-3D2	1	TD-B1b	3
		AEDC (AEY)	1
		SSD (SSF)	2
		BSD (BSF)	1
OTHER AGENCIES		AFMTC (FTY)	1
CIA	1		
NSA	2		
AID	2		
OTS	2		
AEC	2		
PWS	1		
RAND	1		

UNCLASSIFIED

UNCLASSIFIED